




5xD

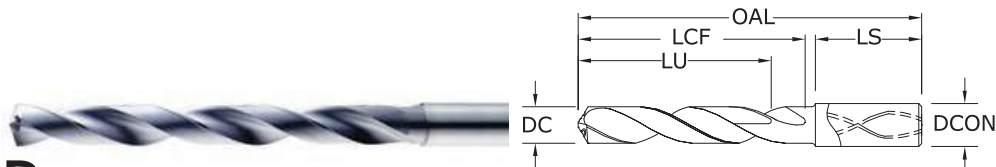

140 5xD

FRACTIONAL & METRIC SERIES

- Coolant through design promotes controlled and consistent operating temperatures improving coolant flow to the cut while maintaining strength
- Split point geometry for improved drill penetration and accuracy
- Controlled edge honing for longevity
- Negative corner position strengthens and protects
- Recommended for materials ≤ 60 HRc (≤ 654 Bhn)

inch & mm									EDP NO.
CUTTING DIAMETER DC	DECIMAL EQUIV.	METRIC EQUIV.	TAP SIZE REFERENCE ONLY	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	SHANK LENGTH LS	Ti-NAMITE-A (AlTiN)
3,0 mm	0.1181			6,0	66,0	28,0	23,0	36,0	63901
3,1 mm	0.1220			6,0	66,0	28,0	23,0	36,0	63902
1/8	0.1250	3.18		6,0	66,0	28,0	23,0	36,0	51901
3,2 mm	0.1260		M3,5 X 0,35	6,0	66,0	28,0	23,0	36,0	63903
3,3 mm	0.1299		M4 X 0,7	6,0	66,0	28,0	23,0	36,0	63904
3,4 mm	0.1339			6,0	66,0	28,0	23,0	36,0	63905
#29	0.1360	3.45	8-32,8-36	6,0	66,0	28,0	23,0	36,0	51902
3,5 mm	0.1378		M4 X 0,5	6,0	66,0	28,0	23,0	36,0	63906
9/64	0.1406	3.57		6,0	66,0	28,0	23,0	36,0	51903
3,6 mm	0.1417		M4 X 0,35	6,0	66,0	28,0	23,0	36,0	63907
3,7 mm	0.1457		M4,5 X 0,75	6,0	66,0	28,0	23,0	36,0	63908
3,8 mm	0.1496		10-24	6,0	74,0	36,0	29,0	36,0	51904
3,9 mm	0.1535			6,0	74,0	36,0	29,0	36,0	63909
5/32	0.1562	3.97		6,0	74,0	36,0	29,0	36,0	51905
4,0 mm	0.1575		M4,5 X 0,5	6,0	74,0	36,0	29,0	36,0	63910
#21	0.1590	4.04	10-32	6,0	74,0	36,0	29,0	36,0	51906
4,1 mm	0.1614			6,0	74,0	36,0	29,0	36,0	63911
4,2 mm	0.1654		M5 / M5 x 0,75	6,0	74,0	36,0	29,0	36,0	63912
4,3 mm	0.1693			6,0	74,0	36,0	29,0	36,0	63913
11/64	0.1719	4.37		6,0	74,0	36,0	29,0	36,0	51907
4,4 mm	0.1732		12-24	6,0	74,0	36,0	29,0	36,0	63914
4,5 mm	0.1772		M5 X 0,5	6,0	74,0	36,0	29,0	36,0	63915
4,6 mm	0.1811		12-28	6,0	74,0	36,0	29,0	36,0	63916
4,7 mm	0.1850		12-32	6,0	74,0	36,0	29,0	36,0	63917
3/16	0.1875	4.76		6,0	82,0	44,0	35,0	36,0	51908
4,8 mm	0.1890		7/32-32	6,0	82,0	44,0	35,0	36,0	63918
4,9 mm	0.1929			6,0	82,0	44,0	35,0	36,0	63919
5,0 mm	0.1969		M6 X 1	6,0	82,0	44,0	35,0	36,0	63920
5,1 mm	0.2008		1/4-20	6,0	82,0	44,0	35,0	36,0	63900
13/64	0.2031	5.16		6,0	82,0	44,0	35,0	36,0	51910
5,2 mm	0.2047		M6 X 0,75	6,0	82,0	44,0	35,0	36,0	63921
5,3 mm	0.2087			6,0	82,0	44,0	35,0	36,0	63922
5,4 mm	0.2126			6,0	82,0	44,0	35,0	36,0	63998
5,5 mm	0.2165		M6 X 0,5	6,0	82,0	44,0	35,0	36,0	63923

continued on next page

TOLERANCES (inch)

 ≤ 1181 DIAMETERDC = $\pm 0.0008/\pm 0.0047$ DCON = h_6 > 1181 – 2362 DIAMETERDC = $\pm 0.0016/\pm 0.0063$ DCON = h_6 > 2362 – 3937 DIAMETERDC = $\pm 0.0024/\pm 0.0083$ DCON = h_6 > 3937 – 7087 DIAMETERDC = $\pm 0.0028/\pm 0.0098$ DCON = h_6 > 7087 – 1.1811 DIAMETERDC = $\pm 0.0031/\pm 0.0114$ DCON = h_6

TOLERANCES (mm)

 ≤ 3 DIAMETERDC = $\pm 0.002/\pm 0.012$ DCON = h_6 > 3 – 6 DIAMETERDC = $\pm 0.004/\pm 0.016$ DCON = h_6 > 6 – 10 DIAMETERDC = $\pm 0.006/\pm 0.021$ DCON = h_6 > 10 – 18 DIAMETERDC = $\pm 0.007/\pm 0.025$ DCON = h_6

STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS
TITANIUM
NON-FERROUS
HARDENED STEELS

For patent
information visit
www.ksptpatents.com

140 5xD

FRACTIONAL & METRIC SERIES


inch & mm									EDP NO.
CUTTING DIAMETER DC	DECIMAL EQUIV.	METRIC EQUIV.	TAP SIZE REFERENCE ONLY	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	SHANK LENGTH LS	Ti-NAMITE-A (AITiN)
7/32	0.2188	5.56	1/4-32	6,0	82,0	44,0	35,0	36,0	51912
5,6 mm	0.2205			6,0	82,0	44,0	35,0	36,0	63924
5,7 mm	0.2244			6,0	82,0	44,0	35,0	36,0	63925
5,8 mm	0.2283			6,0	82,0	44,0	35,0	36,0	63926
5,9 mm	0.2323			6,0	82,0	44,0	35,0	36,0	63927
15/64	0.2344	5.95		6,0	82,0	44,0	35,0	36,0	51913
6,0 mm	0.2362		M7 X 1	6,0	82,0	44,0	35,0	36,0	63928
6,1 mm	0.2402			8,0	91,0	53,0	43,0	36,0	63929
6,2 mm	0.2441		M7 X 0,75	8,0	91,0	53,0	43,0	36,0	63930
6,3 mm	0.2480			8,0	91,0	53,0	43,0	36,0	63931
1/4	0.2500	6.35		8,0	91,0	53,0	43,0	36,0	51914
6,4 mm	0.2520			8,0	91,0	53,0	43,0	36,0	63932
6,5 mm	0.2559			8,0	91,0	53,0	43,0	36,0	63933
F	0.2570	6.53	5/16-18	8,0	91,0	53,0	43,0	36,0	51915
6,6 mm	0.2598			8,0	91,0	53,0	43,0	36,0	63934
6,7 mm	0.2638			8,0	91,0	53,0	43,0	36,0	63935
17/64	0.2656	6.75	5/16-20	8,0	91,0	53,0	43,0	36,0	51916
6,8 mm	0.2677		M8 X 1,25	8,0	91,0	53,0	43,0	36,0	63936
6,9 mm	0.2717		5/16-24	8,0	91,0	53,0	43,0	36,0	63999
7,0 mm	0.2756		M8 X 1	8,0	91,0	53,0	43,0	36,0	63937
7,1 mm	0.2795			8,0	91,0	53,0	43,0	36,0	63938
9/32	0.2812	7.14	5/16-32	8,0	91,0	53,0	43,0	36,0	51918
7,2 mm	0.2835		M8 X 0,75	8,0	91,0	53,0	43,0	36,0	63939
7,3 mm	0.2874			8,0	91,0	53,0	43,0	36,0	63940
7,4 mm	0.2913			8,0	91,0	53,0	43,0	36,0	63941
7,5 mm	0.2953		M8 X 0,5	8,0	91,0	53,0	43,0	36,0	63942
19/64	0.2969	7.54		8,0	91,0	53,0	43,0	36,0	51919
7,6 mm	0.2992			8,0	91,0	53,0	43,0	36,0	63943
7,7 mm	0.3031			8,0	91,0	53,0	43,0	36,0	63944
7,8 mm	0.3071		M9 X 1,25	8,0	91,0	53,0	43,0	36,0	63945
7,9 mm	0.3110			8,0	91,0	53,0	43,0	36,0	63946
5/16	0.3125	7.94	3/8-16	8,0	91,0	53,0	43,0	36,0	51920
8,0 mm	0.3150		M9 X 1	8,0	91,0	53,0	43,0	36,0	63947
8,1 mm	0.3189			10,0	103,0	61,0	49,0	40,0	63948
8,2 mm	0.3228			10,0	103,0	61,0	49,0	40,0	63949
8,3 mm	0.3268			10,0	103,0	61,0	49,0	40,0	63950
21/64	0.3281	8.33	3/8-20	10,0	103,0	61,0	49,0	40,0	51921
8,4 mm	0.3307			10,0	103,0	61,0	49,0	40,0	63951
Q	0.3320	8.43	3/8-24	10,0	103,0	61,0	49,0	40,0	51922
8,5 mm	0.3346		M10 X 1,5	10,0	103,0	61,0	49,0	40,0	63952
8,6 mm	0.3386			10,0	103,0	61,0	49,0	40,0	63953
8,7 mm	0.3425			10,0	103,0	61,0	49,0	40,0	63954

continued on next page

CONTINUED



5xD

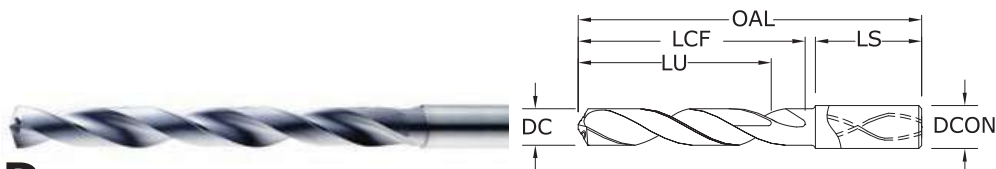

140 5xD

FRACTIONAL & METRIC SERIES

- Coolant through design promotes controlled and consistent operating temperatures improving coolant flow to the cut while maintaining strength
- Split point geometry for improved drill penetration and accuracy
- Controlled edge honing for longevity
- Negative corner position strengthens and protects
- Recommended for materials ≤ 60 HRC (≤ 654 Bhn)

inch & mm									EDP NO.
CUTTING DIAMETER DC	DECIMAL EQUIV.	METRIC EQUIV.	TAP SIZE REFERENCE ONLY	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	SHANK LENGTH LS	Ti-NAMITE-A (AITiN)
11/32	0.3438	8.73	3/8-32	10,0	103,0	61,0	49,0	40,0	51923
8,8 mm	0.3465		M10 X 1,25	10,0	103,0	61,0	49,0	40,0	63955
8,9 mm	0.3504			10,0	103,0	61,0	49,0	40,0	63956
9,0 mm	0.3543		M10 X 1	10,0	103,0	61,0	49,0	40,0	63957
9,1 mm	0.3583			10,0	103,0	61,0	49,0	40,0	63958
23/64	0.3594	9.13		10,0	103,0	61,0	49,0	40,0	51924
9,2 mm	0.3622		M10 X 0,75	10,0	103,0	61,0	49,0	40,0	63959
9,3 mm	0.3661			10,0	103,0	61,0	49,0	40,0	63960
U	0.3680	9.35	7/16-14	10,0	103,0	61,0	49,0	40,0	51925
9,4 mm	0.3701			10,0	103,0	61,0	49,0	40,0	63961
9,5 mm	0.3740		M11 / M10 X 0,5	10,0	103,0	61,0	49,0	40,0	63962
3/8	0.3750	9.53		10,0	103,0	61,0	49,0	40,0	51926
9,6 mm	0.3780			10,0	103,0	61,0	49,0	40,0	63963
9,7 mm	0.3819			10,0	103,0	61,0	49,0	40,0	63964
9,8 mm	0.3858			10,0	103,0	61,0	49,0	40,0	63965
9,9 mm	0.3898			10,0	103,0	61,0	49,0	40,0	63966
25/64	0.3906	9.92	7/16-20	10,0	103,0	61,0	49,0	40,0	51927
10,0 mm	0.3937			10,0	103,0	61,0	49,0	40,0	63967
10,1 mm	0.3976			12,0	118,0	71,0	56,0	45,0	63968
10,2 mm	0.4016		M12 X 1,75	12,0	118,0	71,0	56,0	45,0	63969
10,3 mm	0.4055			12,0	118,0	71,0	56,0	45,0	63970
13/32	0.4062	10.32		12,0	118,0	71,0	56,0	45,0	51928
10,4 mm	0.4094			12,0	118,0	71,0	56,0	45,0	63971
10,5 mm	0.4134		M12 X 1,5	12,0	118,0	71,0	56,0	45,0	63972
10,6 mm	0.4173			12,0	118,0	71,0	56,0	45,0	63973
10,7 mm	0.4213			12,0	118,0	71,0	56,0	45,0	63974
27/64	0.4219	10.72	1/2-13	12,0	118,0	71,0	56,0	45,0	51929
10,8 mm	0.4252		M12 X 1,25	12,0	118,0	71,0	56,0	45,0	63975
10,9 mm	0.4291			12,0	118,0	71,0	56,0	45,0	63976
11,0 mm	0.4331		M12 X 1	12,0	118,0	71,0	56,0	45,0	63977
11,1 mm	0.4370			12,0	118,0	71,0	56,0	45,0	63978
7/16	0.4375	11.11	1/4-18NPT	12,0	118,0	71,0	56,0	45,0	51930
11,2 mm	0.4409			12,0	118,0	71,0	56,0	45,0	63979
11,3 mm	0.4449			12,0	118,0	71,0	56,0	45,0	63980

continued on next page

TOLERANCES (inch)

 $\leq .1181$ DIAMETERDC = $+.00008/+.00047$ DCON = h_6 $>.1181-.2362$ DIAMETERDC = $+.00016/+.00063$ DCON = h_6 $>.2362-.3937$ DIAMETERDC = $+.00024/+.00083$ DCON = h_6 $>.3937-.7087$ DIAMETERDC = $+.00028/+.00098$ DCON = h_6 $>.7087-1.1811$ DIAMETERDC = $+.00031/+.00114$ DCON = h_6

TOLERANCES (mm)

 ≤ 3 DIAMETERDC = $+0.002/+0.012$ DCON = h_6 $>3-6$ DIAMETERDC = $+0.004/+0.016$ DCON = h_6 $>6-10$ DIAMETERDC = $+0.006/+0.021$ DCON = h_6 $>10-18$ DIAMETERDC = $+0.007/+0.025$ DCON = h_6

STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS
TITANIUM
NON-FERROUS
HARDENED STEELS

For patent
information visit
www.ksptpatents.com

140 5xD

FRACTIONAL & METRIC SERIES

CONTINUED

inch & mm									EDP NO.
CUTTING DIAMETER DC	DECIMAL EQUIV.	METRIC EQUIV.	TAP SIZE REFERENCE ONLY	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	SHANK LENGTH LS	Ti-NAMITE-A (AITiN)
11,4 mm	0.4488			12,0	118,0	71,0	56,0	45,0	63981
11,5 mm	0.4528		M12 X 0,5	12,0	118,0	71,0	56,0	45,0	64000
11,6 mm	0.4567			12,0	118,0	71,0	56,0	45,0	63982
11,7 mm	0.4606			12,0	118,0	71,0	56,0	45,0	63983
11,8 mm	0.4646			12,0	118,0	71,0	56,0	45,0	63984
11,9 mm	0.4685			12,0	118,0	71,0	56,0	45,0	63985
15/32	0.4688	11.91	1/2-28	12,0	118,0	71,0	56,0	45,0	51932
12,0 mm	0.4724		M14 X 2	12,0	118,0	71,0	56,0	45,0	63986
31/64	0.4844	12.30	9/16-12	14,0	124,0	77,0	60,0	45,0	51933
12,5 mm	0.4921		M14 X 1,5	14,0	124,0	77,0	60,0	45,0	63987
1/2	0.5000	12.70		14,0	124,0	77,0	60,0	45,0	51934
12,8 mm	0.5039		M14 X 1,25	14,0	124,0	77,0	60,0	45,0	63988
13,0 mm	0.5118		M14 X 1	14,0	124,0	77,0	60,0	45,0	63989
33/64	0.5156	13.10	9/16-18	14,0	124,0	77,0	60,0	45,0	51935
13,5 mm	0.5315		5/8-11	14,0	124,0	77,0	60,0	45,0	64001
13,8 mm	0.5433			14,0	124,0	77,0	60,0	45,0	63990
14,0 mm	0.5512		M16 X 2	14,0	124,0	77,0	60,0	45,0	63991
9/16	0.5625	14.29		16,0	133,0	83,0	63,0	48,0	51937
14,5 mm	0.5709		M16 X 1,5	16,0	133,0	83,0	63,0	48,0	63992
37/64	0.5781	14.68	5/8-18	16,0	133,0	83,0	63,0	48,0	51938
14,8 mm	0.5827			16,0	133,0	83,0	63,0	48,0	63993
15,0 mm	0.5906		M16 X 1	16,0	133,0	83,0	63,0	48,0	63994
15,5 mm	0.6102		M18 X 2,5	16,0	133,0	83,0	63,0	48,0	63995
15,8 mm	0.6220			16,0	133,0	83,0	63,0	48,0	63996
5/8	0.6250	15.88	11/16-16	16,0	133,0	83,0	63,0	48,0	51939
16,0 mm	0.6299			16,0	133,0	83,0	63,0	48,0	63997
21/32	0.6562	16.67	3/4-10	18,0	143,0	93,0	71,0	48,0	51940
11/16	0.6875	17.46	3/4-16	18,0	143,0	93,0	71,0	48,0	51941
3/4	0.7500	19.05	13/16-16	20,0	153,0	101,0	77,0	50,0	51942

Series 140 5D Fractional				DC • in							
Hardness		Vc (sfm)		1/8	3/16	1/4	3/8	1/2	5/8	3/4	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 175 Bhn or ≤ 7 HRc	425	RPM	12988	8659	6494	4329	3247	2598	2165
			(340-510)	Fr	0.0039	0.0059	0.0079	0.0118	0.0157	0.0196	0.0236
				Feed (ipm)	51.0	51.0	51.0	51.0	51.0	51.0	51.0
		≤ 275 Bhn or ≤ 28 HRc	380	RPM	11613	7742	5806	3871	2903	2323	1935
			(304-456)	Fr	0.0035	0.0053	0.0071	0.0106	0.0141	0.0177	0.0212
				Feed (ipm)	41.0	41.0	41.0	41.0	41.0	41.0	41.0
		≤ 425 Bhn or ≤ 45 HRc	220	RPM	6723	4482	3362	2241	1681	1345	1121
			(176-264)	Fr	0.0030	0.0045	0.0059	0.0089	0.0119	0.0149	0.0178
				Feed (ipm)	20.0	20.0	20.0	20.0	20.0	20.0	20.0
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 275 Bhn or ≤ 28 HRc	330	RPM	10085	6723	5042	3362	2521	2017	1681
			(264-396)	Fr	0.0030	0.0045	0.0059	0.0089	0.0119	0.0149	0.0178
				Feed (ipm)	30.0	30.0	30.0	30.0	30.0	30.0	30.0
		≤ 375 Bhn or ≤ 40 HRc	200	RPM	6112	4075	3056	2037	1528	1222	1019
			(160-240)	Fr	0.0025	0.0038	0.0051	0.0076	0.0101	0.0127	0.0152
				Feed (ipm)	15.5	15.5	15.5	15.5	15.5	15.5	15.5
		≤ 450 Bhn or ≤ 48 HRc	140	RPM	4278	2852	2139	1426	1070	856	713
			(112-168)	Fr	0.0018	0.0027	0.0036	0.0054	0.0072	0.0090	0.0108
				Feed (ipm)	7.7	7.7	7.7	7.7	7.7	7.7	7.7
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 185 Bhn or ≤ 9 HRc	305	RPM	9321	6214	4660	3107	2330	1864	1553
			(244-366)	Fr	0.0026	0.0039	0.0051	0.0077	0.0103	0.0129	0.0154
				Feed (ipm)	24.0	24.0	24.0	24.0	24.0	24.0	24.0
		≤ 275 Bhn or ≤ 28 HRc	195	RPM	5959	3973	2980	1986	1490	1192	993
			(156-234)	Fr	0.0020	0.0030	0.0040	0.0060	0.0081	0.0101	0.0121
				Feed (ipm)	12.0	12.0	12.0	12.0	12.0	12.0	12.0
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	≤ 275 Bhn or ≤ 28 HRc	150	RPM	4584	3056	2292	1528	1146	917	764
			(120-180)	Fr	0.0020	0.0030	0.0040	0.0060	0.0079	0.0099	0.0119
				Feed (ipm)	9.1	9.1	9.1	9.1	9.1	9.1	9.1
		≤ 375 Bhn or ≤ 40 HRc	110	RPM	3362	2241	1681	1121	840	672	560
			(88-132)	Fr	0.0018	0.0027	0.0036	0.0054	0.0071	0.0089	0.0107
				Feed (ipm)	6.0	6.0	6.0	6.0	6.0	6.0	6.0
K	CAST IRONS Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	360	RPM	11002	7334	5501	3667	2750	2200	1834
			(288-432)	Fr	0.0045	0.0068	0.0091	0.0136	0.0182	0.0227	0.0273
				Feed (ipm)	50.0	50.0	50.0	50.0	50.0	50.0	50.0
		≤ 260 Bhn or ≤ 26 HRc	335	RPM	10238	6825	5119	3413	2559	2048	1706
			(268-402)	Fr	0.0045	0.0068	0.0091	0.0136	0.0182	0.0227	0.0273
				Feed (ipm)	46.5	46.5	46.5	46.5	46.5	46.5	46.5

continued on next page

Series 140 5D Fractional				DC • in							
		Hardness	Vc (sfm)	1/8	3/16	1/4	3/8	1/2	5/8	3/4	
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 80 Bhn or ≤ 47 HRb	770	RPM	23531	15687	11766	7844	5883	4706	3922
			(616-924)	Fr	0.0049	0.0073	0.0098	0.0147	0.0195	0.0244	0.0293
			Feed (ipm)	115.0	115.0	115.0	115.0	115.0	115.0	115.0	
		≤ 150 Bhn or ≤ 7 HRc	660	RPM	20170	13446	10085	6723	5042	4034	3362
			(528-792)	Fr	0.0050	0.0074	0.0099	0.0149	0.0198	0.0248	0.0297
			Feed (ipm)	100.0	100.0	100.0	100.0	100.0	100.0	100.0	
	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 140 Bhn or ≤ 3 HRc	550	RPM	16808	11205	8404	5603	4202	3362	2801
			(440-660)	Fr	0.0020	0.0030	0.0040	0.0060	0.0080	0.0100	0.0120
			Feed (ipm)	33.5	33.5	33.5	33.5	33.5	33.5	33.5	
		≤ 200 Bhn or ≤ 23 HRc	440	RPM	13446	8964	6723	4482	3362	2689	2241
			(352-528)	Fr	0.0020	0.0030	0.0040	0.0060	0.0080	0.0100	0.0120
			Feed (ipm)	27.0	27.0	27.0	27.0	27.0	27.0	27.0	
S	SUPER ALLOYS (NICKEL , COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400, Rene, Waspaloy	≤ 300 Bhn or ≤ 32 HRc	95	RPM	2903	1935	1452	968	726	581	484
			(76-114)	Fr	0.0008	0.0012	0.0016	0.0024	0.0032	0.0040	0.0048
			Feed (ipm)	2.3	2.3	2.3	2.3	2.3	2.3	2.3	
		≤ 400 Bhn or ≤ 43 HRc	50	RPM	1528	1019	764	509	382	306	255
			(40-60)	Fr	0.0007	0.0010	0.0013	0.0020	0.0026	0.0033	0.0039
			Feed (ipm)	1.0	1.0	1.0	1.0	1.0	1.0	1.0	
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	≤ 275 Bhn or ≤ 28 HRc	215	RPM	6570	4380	3285	2190	1643	1314	1095
			(172-258)	Fr	0.0018	0.0026	0.0035	0.0053	0.0070	0.0088	0.0105
			Feed (ipm)	11.5	11.5	11.5	11.5	11.5	11.5	11.5	
		≤ 350 Bhn or ≤ 38 HRc	160	RPM	4890	3260	2445	1630	1222	978	815
			(128-192)	Fr	0.0016	0.0024	0.0032	0.0048	0.0064	0.0080	0.0096
			Feed (ipm)	7.8	7.8	7.8	7.8	7.8	7.8	7.8	
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 200 Bhn or ≤ 13 HRc	145	RPM	4431	2954	2216	1477	1108	886	739
			(116-174)	Fr	0.0026	0.0039	0.0052	0.0078	0.0104	0.0130	0.0156
			Feed (ipm)	11.5	11.5	11.5	11.5	11.5	11.5	11.5	
		≤ 375 Bhn or ≤ 40 HRc	95	RPM	2903	1935	1452	968	726	581	484
			(76-114)	Fr	0.0012	0.0018	0.0024	0.0036	0.0048	0.0060	0.0072
			Feed (ipm)	3.5	3.5	3.5	3.5	3.5	3.5	3.5	
		≤ 475 Bhn or ≤ 50 HRc	85	RPM	2598	1732	1299	866	649	520	433
			(68-102)	Fr	0.0008	0.0012	0.0015	0.0023	0.0031	0.0038	0.0046
			Feed (ipm)	2.0	2.0	2.0	2.0	2.0	2.0	2.0	

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)
 $\text{rpm} = \text{Vc} \times 3.82 / \text{DC}$
 $\text{ipm} = \text{Fr} \times \text{rpm}$
 reduce speed and feed for materials harder than listed
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Series 140M 5D Metric		Hardness	Vc (m/min)	DC • mm							
				3	6	8	10	12	14	16	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 175 Bhn or ≤ 7 HRc	130	RPM	13733	6867	5150	4120	3433	2943	2575
			(104-155)	Fr	0.095	0.189	0.252	0.316	0.379	0.442	0.505
				Feed (mm/min)	1300	1300	1300	1300	1300	1300	1300
		≤ 275 Bhn or ≤ 28 HRc	116	RPM	12279	6140	4605	3684	3070	2631	2302
			(93-139)	Fr	0.086	0.171	0.228	0.285	0.342	0.399	0.456
				Feed (mm/min)	1050	1050	1050	1050	1050	1050	1050
		≤ 425 Bhn or ≤ 45 HRc	67	RPM	7109	3555	2666	2133	1777	1523	1333
			(54-80)	Fr	0.071	0.142	0.189	0.237	0.284	0.332	0.379
				Feed (mm/min)	505	505	505	505	505	505	505
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 275 Bhn or ≤ 28 HRc	101	RPM	10664	5332	3999	3199	2666	2285	1999
			(80-121)	Fr	0.071	0.143	0.190	0.238	0.285	0.333	0.380
				Feed (mm/min)	760	760	760	760	760	760	760
		≤ 375 Bhn or ≤ 40 HRc	61	RPM	6463	3231	2424	1939	1616	1385	1212
			(49-73)	Fr	0.062	0.124	0.165	0.206	0.248	0.289	0.330
				Feed (mm/min)	400	400	400	400	400	400	400
		≤ 450 Bhn or ≤ 48 HRc	43	RPM	4524	2262	1696	1357	1131	969	848
			(34-51)	Fr	0.043	0.086	0.115	0.144	0.172	0.201	0.230
				Feed (mm/min)	195	195	195	195	195	195	195
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 185 Bhn or ≤ 9 HRc	93	RPM	9856	4928	3696	2957	2464	2112	1848
			(74-112)	Fr	0.061	0.123	0.164	0.205	0.246	0.286	0.327
				Feed (mm/min)	605	605	605	605	605	605	605
		≤ 275 Bhn or ≤ 28 HRc	59	RPM	6301	3151	2363	1890	1575	1350	1181
			(48-71)	Fr	0.048	0.095	0.127	0.159	0.190	0.222	0.254
				Feed (mm/min)	300	300	300	300	300	300	300
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	≤ 275 Bhn or ≤ 28 HRc	46	RPM	4847	2424	1818	1454	1212	1039	909
			(37-55)	Fr	0.047	0.095	0.127	0.158	0.190	0.221	0.253
				Feed (mm/min)	230	230	230	230	230	230	230
		≤ 375 Bhn or ≤ 40 HRc	34	RPM	3555	1777	1333	1066	889	762	666
			(27-40)	Fr	0.042	0.084	0.113	0.141	0.169	0.197	0.225
				Feed (mm/min)	150	150	150	150	150	150	150
K	CAST IRONS Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	110	RPM	11633	5816	4362	3490	2908	2493	2181
			(88-132)	Fr	0.109	0.218	0.291	0.364	0.437	0.509	0.582
				Feed (mm/min)	1270	1270	1270	1270	1270	1270	1270
		≤ 260 Bhn or ≤ 26 HRc	102	RPM	10825	5413	4059	3248	2706	2320	2030
			(82-123)	Fr	0.109	0.218	0.291	0.363	0.436	0.509	0.581
				Feed (mm/min)	1180	1180	1180	1180	1180	1180	1180
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 80 Bhn or ≤ 47 HRb	235	RPM	24882	12441	9331	7465	6220	5332	4665
			(188-282)	Fr	0.118	0.237	0.316	0.395	0.473	0.552	0.631
				Feed (mm/min)	2945	2945	2945	2945	2945	2945	2945
		≤ 150 Bhn or ≤ 7 HRc	201	RPM	21327	10664	7998	6398	5332	4570	3999
			(161-241)	Fr	0.119	0.238	0.318	0.397	0.476	0.556	0.635
				Feed (mm/min)	2540	2540	2540	2540	2540	2540	2540
	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 140 Bhn or ≤ 3 HRc	168	RPM	17773	8886	6665	5332	4443	3808	3332
			(134-201)	Fr	0.048	0.096	0.128	0.159	0.191	0.223	0.255
				Feed (mm/min)	850	850	850	850	850	850	850
		≤ 200 Bhn or ≤ 23 HRc	134	RPM	14218	7109	5332	4265	3555	3047	2666
			(107-161)	Fr	0.048	0.096	0.128	0.161	0.193	0.225	0.257
				Feed (mm/min)	685	685	685	685	685	685	685

continued on next page

Series 140M 5D Metric				DC • mm									
Hardness		Vc (m/min)		3	6	8	10	12	14	16			
S	SUPER ALLOYS (NICKEL , COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400, Rene, Waspaloy	≤ 300 Bhn or ≤ 32 HRc	29	RPM	3070	1535	1151	921	767	658	576		
			(23-35)	Fr	0.020	0.039	0.052	0.065	0.078	0.091	0.104		
				Feed (mm/min)	60	60	60	60	60	60	60		
		≤ 400 Bhn or ≤ 43 HRc	15	RPM	1616	808	606	485	404	346	303		
			(12-18)	Fr	0.015	0.031	0.041	0.052	0.062	0.072	0.083		
				Feed (mm/min)	25	25	25	25	25	25	25		
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	≤ 275 Bhn or ≤ 28 HRc	66	RPM	6947	3474	2605	2084	1737	1489	1303		
			(52-79)	Fr	0.040	0.079	0.106	0.132	0.158	0.185	0.211		
				Feed (mm/min)	275	275	275	275	275	275	275		
		≤ 350 Bhn or ≤ 38 HRc	49	RPM	5170	2585	1939	1551	1293	1108	969		
			(39-59)	Fr	0.039	0.077	0.103	0.129	0.155	0.181	0.206		
				Feed (mm/min)	200	200	200	200	200	200	200		
		≤ 440 Bhn or ≤ 47 HRc	26	RPM	2747	1373	1030	824	687	589	515		
			(21-31)	Fr	0.029	0.058	0.078	0.097	0.117	0.136	0.155		
				Feed (mm/min)	80	80	80	80	80	80	80		
		H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 200 Bhn or ≤ 13 HRc	44	RPM	4686	2343	1757	1406	1171	1004	879
					(35-53)	Fr	0.061	0.122	0.162	0.203	0.243	0.284	0.324
						Feed (mm/min)	285	285	285	285	285	285	285
≤ 375 Bhn or ≤ 40 HRc	29			RPM	3070	1535	1151	921	767	658	576		
	(23-35)			Fr	0.029	0.059	0.078	0.098	0.117	0.137	0.156		
				Feed (mm/min)	90	90	90	90	90	90	90		
≤ 475 Bhn or ≤ 50 HRc	26			RPM	2747	1373	1030	824	687	589	515		
	(21-31)			Fr	0.018	0.036	0.049	0.061	0.073	0.085	0.097		
				Feed (mm/min)	50	50	50	50	50	50	50		

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = (Vc x 1000) / (DC x 3.14)


mm/min = Fr x rpm

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



8xD

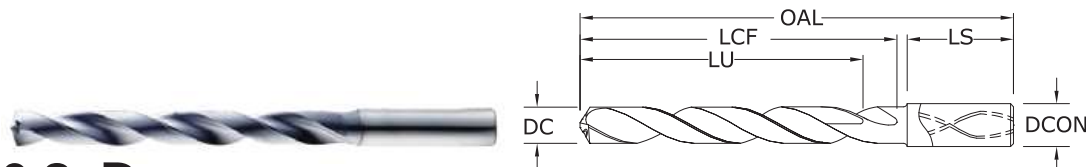

140 8xD

FRACTIONAL & METRIC SERIES

- Coolant through design promotes controlled and consistent operating temperatures improving coolant flow to the cut while maintaining strength
- Split point geometry for improved drill penetration and accuracy
- Controlled edge honing for longevity
- Negative corner position strengthens and protects
- Recommended for materials ≤ 60 HRc (≤ 654 Bhn)

inch & mm									EDP NO.
CUTTING DIAMETER DC	DECIMAL EQUIV.	METRIC EQUIV.	TAP SIZE REFERENCE ONLY	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	SHANK LENGTH LS	Ti-NAMITE-A (AlTiN)
3,0 mm	0.1181			6,0	72,0	34,0	29,0	36,0	63575
3,1 mm	0.1220			6,0	72,0	34,0	29,0	36,0	63576
1/8	0.1250	3.18		6,0	72,0	34,0	29,0	36,0	51801
3,2 mm	0.1260		M3,5 X 0,35	6,0	72,0	34,0	29,0	36,0	63577
3,3 mm	0.1299		M4 X 0,7	6,0	72,0	34,0	29,0	36,0	63578
3,4 mm	0.1339			6,0	72,0	34,0	29,0	36,0	63579
#29	0.1360	3.45	8-32,8-36	6,0	72,0	34,0	29,0	36,0	51802
3,5 mm	0.1378		M4 X 0,5	6,0	72,0	34,0	29,0	36,0	63580
9/64	0.1406	3.57		6,0	72,0	34,0	29,0	36,0	51803
3,6 mm	0.1417		M4 X 0,35	6,0	72,0	34,0	29,0	36,0	63581
3,7 mm	0.1457		M4,5 X 0,75	6,0	72,0	34,0	29,0	36,0	63582
3,8 mm	0.1496		10-24	6,0	81,0	43,0	36,0	36,0	63583
3,9 mm	0.1535			6,0	81,0	43,0	36,0	36,0	63584
5/32	0.1562	3.97		6,0	81,0	43,0	36,0	36,0	51804
4,0 mm	0.1575		M4,5 X 0,5	6,0	81,0	43,0	36,0	36,0	63585
#21	0.1590	4.04	10-32	6,0	81,0	43,0	36,0	36,0	51805
4,1 mm	0.1614			6,0	81,0	43,0	36,0	36,0	63586
4,2 mm	0.1654		M5 / M5 X 0,75	6,0	81,0	43,0	36,0	36,0	63587
4,3 mm	0.1693			6,0	81,0	43,0	36,0	36,0	63588
11/64	0.1719	4.37		6,0	81,0	43,0	36,0	36,0	51806
4,4 mm	0.1732		12-24	6,0	81,0	43,0	36,0	36,0	63589
4,5 mm	0.1772		M5 X 0,5	6,0	81,0	43,0	36,0	36,0	63590
4,6 mm	0.1811		12-28	6,0	81,0	43,0	36,0	36,0	63591
4,7 mm	0.1850		12-32	6,0	81,0	43,0	36,0	36,0	63592
3/16	0.1875	4.76		6,0	95,0	57,0	48,0	36,0	51807
4,8 mm	0.1890		7/32-32	6,0	95,0	57,0	48,0	36,0	63593
4,9 mm	0.1929			6,0	95,0	57,0	48,0	36,0	63594
5,0 mm	0.1969		M6 X 1	6,0	95,0	57,0	48,0	36,0	63595
5,1 mm	0.2008		1/4-20	6,0	95,0	57,0	48,0	36,0	63596
13/64	0.2031	5.16		6,0	95,0	57,0	48,0	36,0	51808
5,2 mm	0.2047		M6 X 0,75	6,0	95,0	57,0	48,0	36,0	63597
5,3 mm	0.2087			6,0	95,0	57,0	48,0	36,0	63598
5,4 mm	0.2126			6,0	95,0	57,0	48,0	36,0	63599
5,5 mm	0.2165		M6 X 0,5	6,0	95,0	57,0	48,0	36,0	63600

continued on next page

TOLERANCES (inch)

 ≤ 1181 DIAMETERDC = $+0.0008/+0.0047$ DCON = h_6 $> 1181 - 2362$ DIAMETERDC = $+0.0016/+0.0063$ DCON = h_6 $> 2362 - 3937$ DIAMETERDC = $+0.0024/+0.0083$ DCON = h_6 $> 3937 - 7087$ DIAMETERDC = $+0.0028/+0.0098$ DCON = h_6 $> 7087 - 1.1811$ DIAMETERDC = $+0.0031/+0.0114$ DCON = h_6

TOLERANCES (mm)

 ≤ 3 DIAMETERDC = $+0.002/+0.012$ DCON = h_6 $> 3 - 6$ DIAMETERDC = $+0.004/+0.016$ DCON = h_6 $> 6 - 10$ DIAMETERDC = $+0.006/+0.021$ DCON = h_6 $> 10 - 18$ DIAMETERDC = $+0.007/+0.025$ DCON = h_6

STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS
TITANIUM
NON-FERROUS
HARDENED STEELS

For patent information visit
www.ksptpatents.com

140 8xD

FRACTIONAL & METRIC SERIES


CUTTING DIAMETER DC	DECIMAL EQUIV.	METRIC EQUIV.	inch & mm						EDP NO.
			TAP SIZE REFERENCE ONLY	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	SHANK LENGTH LS	
7/32	0.2188	5.56	1/4-32	6,0	95,0	57,0	48,0	36,0	51809
5,6 mm	0.2205			6,0	95,0	57,0	48,0	36,0	63601
5,7 mm	0.2244			6,0	95,0	57,0	48,0	36,0	63602
5,8 mm	0.2283			6,0	95,0	57,0	48,0	36,0	63603
5,9 mm	0.2323			6,0	95,0	57,0	48,0	36,0	63604
15/64	0.2344	5.95		6,0	95,0	57,0	48,0	36,0	51810
6,0 mm	0.2362		M7 X 1	6,0	95,0	57,0	48,0	36,0	63605
6,1 mm	0.2402			8,0	114,0	76,0	64,0	36,0	63606
6,2 mm	0.2441		M7 X 0,75	8,0	114,0	76,0	64,0	36,0	63607
6,3 mm	0.2480			8,0	114,0	76,0	64,0	36,0	63608
1/4	0.2500	6.35		8,0	114,0	76,0	64,0	36,0	51811
6,4 mm	0.2520			8,0	114,0	76,0	64,0	36,0	63609
6,5 mm	0.2559			8,0	114,0	76,0	64,0	36,0	63610
F	0.2570	6.53	5/16-18	8,0	114,0	76,0	64,0	36,0	51812
6,6 mm	0.2598			8,0	114,0	76,0	64,0	36,0	63611
6,7 mm	0.2638			8,0	114,0	76,0	64,0	36,0	63612
17/64	0.2656	6.75	5/16-20	8,0	114,0	76,0	64,0	36,0	51813
6,8 mm	0.2677		M8 X 1,25	8,0	114,0	76,0	64,0	36,0	63613
6,9 mm	0.2717			8,0	114,0	76,0	64,0	36,0	63614
7,0 mm	0.2756		M8 X 1	8,0	114,0	76,0	64,0	36,0	63615
7,1 mm	0.2795			8,0	114,0	76,0	64,0	36,0	63616
9/32	0.2812	7.14	5/16-32	8,0	114,0	76,0	64,0	36,0	51814
7,2 mm	0.2835		M8 X 0,75	8,0	114,0	76,0	64,0	36,0	63617
7,3 mm	0.2874			8,0	114,0	76,0	64,0	36,0	63618
7,4 mm	0.2913			8,0	114,0	76,0	64,0	36,0	63619
7,5 mm	0.2953		M8 X 0,5	8,0	114,0	76,0	64,0	36,0	63620
19/64	0.2969	7.54		8,0	114,0	76,0	64,0	36,0	51815
7,6 mm	0.2992			8,0	114,0	76,0	64,0	36,0	63621
7,7 mm	0.3031			8,0	114,0	76,0	64,0	36,0	63622
7,8 mm	0.3071		M9 X 1,25	8,0	114,0	76,0	64,0	36,0	63623
7,9 mm	0.3110			8,0	114,0	76,0	64,0	36,0	63624
5/16	0.3125	7.94	3/8-16	8,0	114,0	76,0	64,0	36,0	51816
8,0 mm	0.3150		M9 X 1	8,0	114,0	76,0	64,0	36,0	63625
8,1 mm	0.3189			10,0	142,0	95,0	80,0	40,0	63626
8,2 mm	0.3228			10,0	142,0	95,0	80,0	40,0	63627
8,3 mm	0.3268			10,0	142,0	95,0	80,0	40,0	63628
21/64	0.3281	8.33	3/8-20	10,0	142,0	95,0	80,0	40,0	51817
8,4 mm	0.3307			10,0	142,0	95,0	80,0	40,0	63629
Q	0.3320	8.43	3/8-24	10,0	142,0	95,0	80,0	40,0	51818
8,5 mm	0.3346		M10 X 1,5	10,0	142,0	95,0	80,0	40,0	63630
8,6 mm	0.3386			10,0	142,0	95,0	80,0	40,0	63631
8,7 mm	0.3425			10,0	142,0	95,0	80,0	40,0	63632

continued on next page

CONTINUED



8xD

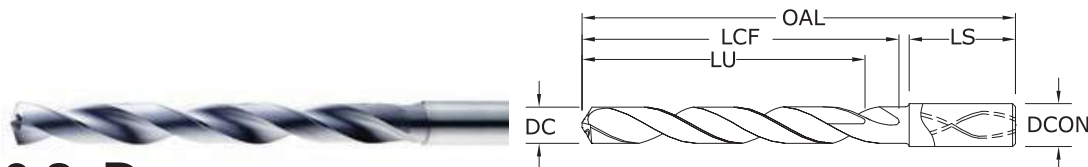

140 8xD

FRACTIONAL & METRIC SERIES

- Coolant through design promotes controlled and consistent operating temperatures improving coolant flow to the cut while maintaining strength
- Split point geometry for improved drill penetration and accuracy
- Controlled edge honing for longevity
- Negative corner position strengthens and protects
- Recommended for materials ≤ 60 HRc (≤ 654 Bhn)

inch & mm									EDP NO.
CUTTING DIAMETER DC	DECIMAL EQUIV.	METRIC EQUIV.	TAP SIZE REFERENCE ONLY	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	SHANK LENGTH LS	Ti-NAMITE-A (AITiN)
11/32	0.3438	8.73	3/8-32	10,0	142,0	95,0	80,0	40,0	51819
8,8 mm	0.3465		M10 X 1,25	10,0	142,0	95,0	80,0	40,0	63633
8,9 mm	0.3504			10,0	142,0	95,0	80,0	40,0	63634
9,0 mm	0.3543		M10 X 1	10,0	142,0	95,0	80,0	40,0	63635
9,1 mm	0.3583			10,0	142,0	95,0	80,0	40,0	63636
23/64	0.3594	9.13		10,0	142,0	95,0	80,0	40,0	51820
9,2 mm	0.3622		M10 X 0,75	10,0	142,0	95,0	80,0	40,0	63637
9,3 mm	0.3661			10,0	142,0	95,0	80,0	40,0	63638
U	0.3680	9.35	7/16-14	10,0	142,0	95,0	80,0	40,0	51821
9,4 mm	0.3701			10,0	142,0	95,0	80,0	40,0	63639
9,5 mm	0.3740		M11 / M10 X 0,5	10,0	142,0	95,0	80,0	40,0	63640
3/8	0.3750	9.53		10,0	142,0	95,0	80,0	40,0	51822
9,6 mm	0.3780			10,0	142,0	95,0	80,0	40,0	63641
9,7 mm	0.3819			10,0	142,0	95,0	80,0	40,0	63642
9,8 mm	0.3858			10,0	142,0	95,0	80,0	40,0	63643
9,9 mm	0.3898			10,0	142,0	95,0	80,0	40,0	63644
25/64	0.3906	9.92	7/16-20	10,0	142,0	95,0	80,0	40,0	51823
10,0 mm	0.3937			10,0	142,0	95,0	80,0	40,0	63645
10,1 mm	0.3976			12,0	162,0	114,0	96,0	45,0	63646
10,2 mm	0.4016		M12 X 1,75	12,0	162,0	114,0	96,0	45,0	63647
10,3 mm	0.4055			12,0	162,0	114,0	96,0	45,0	63648
13/32	0.4062	10.32		12,0	162,0	114,0	96,0	45,0	51824
10,4 mm	0.4094			12,0	162,0	114,0	96,0	45,0	63649
10,5 mm	0.4134		M12 X 1,5	12,0	162,0	114,0	96,0	45,0	63650
10,6 mm	0.4173			12,0	162,0	114,0	96,0	45,0	63651
10,7 mm	0.4213			12,0	162,0	114,0	96,0	45,0	63652
27/64	0.4219	10.72	1/2-13	12,0	162,0	114,0	96,0	45,0	51825
10,8 mm	0.4252		M12 X 1,25	12,0	162,0	114,0	96,0	45,0	63653
10,9 mm	0.4291			12,0	162,0	114,0	96,0	45,0	63654
11,0 mm	0.4331		M12 X 1	12,0	162,0	114,0	96,0	45,0	63655
11,1 mm	0.4370			12,0	162,0	114,0	96,0	45,0	63656
7/16	0.4375	11.11	1/4-18NPT	12,0	162,0	114,0	96,0	45,0	51826

continued on next page

TOLERANCES (inch)

 ≤ 1181 DIAMETERDC = $+0.0008/+0.00047$ DCON = h_6

>1181–2362 DIAMETER

DC = $+0.0016/+0.00063$ DCON = h_6

>2362–3937 DIAMETER

DC = $+0.0024/+0.00083$ DCON = h_6

>3937–7087 DIAMETER

DC = $+0.0028/+0.00098$ DCON = h_6

>7087–1.1811 DIAMETER

DC = $+0.0031/+0.00114$ DCON = h_6

TOLERANCES (mm)

 ≤ 3 DIAMETERDC = $+0.002/+0.012$ DCON = h_6

>3–6 DIAMETER

DC = $+0.004/+0.016$ DCON = h_6

>6–10 DIAMETER

DC = $+0.006/+0.021$ DCON = h_6

>10–18 DIAMETER

DC = $+0.007/+0.025$ DCON = h_6

STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS
TITANIUM
NON-FERROUS
HARDENED STEELS

For patent
information visit
www.ksptpatents.com

140 8xD

FRACTIONAL & METRIC SERIES

CUTTING DIAMETER DC	DECIMAL EQUIV.	METRIC EQUIV.	TAP SIZE REFERENCE ONLY	inch & mm					EDP NO. Ti-NAMITE-A (AITIN)
				SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	SHANK LENGTH LS	
11,2 mm	0.4409			12,0	162,0	114,0	96,0	45,0	63657
11,3 mm	0.4449			12,0	162,0	114,0	96,0	45,0	63658
11,4 mm	0.4488			12,0	162,0	114,0	96,0	45,0	63659
11,5 mm	0.4528		M12 X 0,5	12,0	162,0	114,0	96,0	45,0	63660
11,6 mm	0.4567			12,0	162,0	114,0	96,0	45,0	63661
11,7 mm	0.4606			12,0	162,0	114,0	96,0	45,0	63662
11,8 mm	0.4646			12,0	162,0	114,0	96,0	45,0	63663
11,9 mm	0.4685			12,0	162,0	114,0	96,0	45,0	63664
15/32	0.4688	11.91	1/2-28	12,0	162,0	114,0	96,0	45,0	51827
12,0 mm	0.4724		M14 X 2	12,0	162,0	114,0	96,0	45,0	63665
31/64	0.4844	12.30	9/16-12	14,0	178,0	133,0	112,0	45,0	51828
12,5 mm	0.4921		M14 X 1,5	14,0	178,0	133,0	112,0	45,0	63666
1/2	0.5000	12.70		14,0	178,0	133,0	112,0	45,0	51829
12,8 mm	0.5039		M14 X 1,25	14,0	178,0	133,0	112,0	45,0	63667
13,0 mm	0.5118		M14 X 1	14,0	178,0	133,0	112,0	45,0	63668
33/64	0.5156	13.10	9/16-18	14,0	178,0	133,0	112,0	45,0	51830
13,5 mm	0.5315		5/8-11	14,0	178,0	133,0	112,0	45,0	63669
13,8 mm	0.5433			14,0	178,0	133,0	112,0	45,0	63670
14,0 mm	0.5512		M16 X 2	14,0	178,0	133,0	112,0	45,0	63671
9/16	0.5625	14.29		16,0	203,0	152,0	128,0	48,0	51831
14,5 mm	0.5709		M16 X 1,5	16,0	203,0	152,0	128,0	48,0	63672
37/64	0.5781	14.68	5/8-18	16,0	203,0	152,0	128,0	48,0	51832
14,8 mm	0.5827			16,0	203,0	152,0	128,0	48,0	63673
15,0 mm	0.5906		M16 X 1	16,0	203,0	152,0	128,0	48,0	63674
15,5 mm	0.6102		M18 X 2,5	16,0	203,0	152,0	128,0	48,0	63675
15,8 mm	0.6220			16,0	203,0	152,0	128,0	48,0	63676
5/8	0.6250	15.88	11/16-16	16,0	203,0	152,0	128,0	48,0	51833
16,0 mm	0.6299			16,0	203,0	152,0	128,0	48,0	63677
21/32	0.6562	16.67	3/4-10	18,0	222,0	171,0	144,0	48,0	51834
11/16	0.6875	17.46	3/4-16	18,0	222,0	171,0	144,0	48,0	51835
3/4	0.7500	19.05	13/16-16	20,0	243,0	190,0	160,0	50,0	51836

CONTINUED

Series 140 8D Fractional				DC • in							
	Hardness	Vc (sfm)									
				1/8	3/16	1/4	3/8	1/2	5/8	3/4	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 175 Bhn or ≤ 7 HRc	405	RPM	12377	8251	6188	4126	3094	2475	2063
			Fr	0.0036	0.0053	0.0071	0.0107	0.0142	0.0178	0.0213	
			Feed (ipm)	44.0	44.0	44.0	44.0	44.0	44.0	44.0	
		≤ 275 Bhn or ≤ 28 HRc	370	RPM	11307	7538	5654	3769	2827	2261	1885
			Fr	0.0030	0.0045	0.0060	0.0090	0.0120	0.0150	0.0180	
			Feed (ipm)	34.0	34.0	34.0	34.0	34.0	34.0	34.0	
		≤ 425 Bhn or ≤ 45 HRc	210	RPM	6418	4278	3209	2139	1604	1284	1070
			Fr	0.0026	0.0039	0.0051	0.0077	0.0103	0.0129	0.0154	
			Feed (ipm)	16.5	16.5	16.5	16.5	16.5	16.5	16.5	
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 275 Bhn or ≤ 28 HRc	320	RPM	9779	6519	4890	3260	2445	1956	1630
			Fr	0.0026	0.0038	0.0051	0.0077	0.0102	0.0128	0.0153	
			Feed (ipm)	25.0	25.0	25.0	25.0	25.0	25.0	25.0	
		≤ 375 Bhn or ≤ 40 HRc	190	RPM	5806	3871	2903	1935	1452	1161	968
			Fr	0.0020	0.0030	0.0040	0.0059	0.0079	0.0099	0.0119	
			Feed (ipm)	11.5	11.5	11.5	11.5	11.5	11.5	11.5	
		≤ 450 Bhn or ≤ 48 HRc	135	RPM	4126	2750	2063	1375	1031	825	688
			Fr	0.0016	0.0024	0.0032	0.0047	0.0063	0.0079	0.0095	
			Feed (ipm)	6.5	6.5	6.5	6.5	6.5	6.5	6.5	
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 185 Bhn or ≤ 9 HRc	290	RPM	8862	5908	4431	2954	2216	1772	1477
			Fr	0.0020	0.0030	0.0039	0.0059	0.0079	0.0099	0.0118	
			Feed (ipm)	17.5	17.5	17.5	17.5	17.5	17.5	17.5	
		≤ 275 Bhn or ≤ 28 HRc	180	RPM	5501	3667	2750	1834	1375	1100	917
			Fr	0.0018	0.0027	0.0036	0.0055	0.0073	0.0091	0.0109	
			Feed (ipm)	10.0	10.0	10.0	10.0	10.0	10.0	10.0	
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	≤ 275 Bhn or ≤ 28 HRc	130	RPM	3973	2649	1986	1324	993	795	662
			Fr	0.0018	0.0026	0.0035	0.0053	0.0070	0.0088	0.0106	
			Feed (ipm)	7.0	7.0	7.0	7.0	7.0	7.0	7.0	
		≤ 375 Bhn or ≤ 40 HRc	95	RPM	2903	1935	1452	968	726	581	484
			Fr	0.0016	0.0023	0.0031	0.0047	0.0062	0.0078	0.0093	
			Feed (ipm)	4.5	4.5	4.5	4.5	4.5	4.5	4.5	
K	CAST IRONS Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	350	RPM	10696	7131	5348	3565	2674	2139	1783
			Fr	0.0037	0.0056	0.0075	0.0112	0.0150	0.0187	0.0224	
			Feed (ipm)	40.0	40.0	40.0	40.0	40.0	40.0	40.0	
		≤ 260 Bhn or ≤ 26 HRc	310	RPM	9474	6316	4737	3158	2368	1895	1579
			Fr	0.0039	0.0059	0.0078	0.0117	0.0156	0.0195	0.0234	
			Feed (ipm)	37.0	37.0	37.0	37.0	37.0	37.0	37.0	

continued on next page

Series 140 8D Fractional				DC • in							
Hardness		Vc (sfm)		1/8	3/16	1/4	3/8	1/2	5/8	3/4	
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 80 Bhn or ≤ 47 HRb	730	RPM	22309	14873	11154	7436	5577	4462	3718
			(584-876)	Fr	0.0045	0.0067	0.0090	0.0134	0.0179	0.0224	0.0269
				Feed (ipm)	100.0	100.0	100.0	100.0	100.0	100.0	100.0
		≤ 150 Bhn or ≤ 7 HRc	635	RPM	19406	12937	9703	6469	4851	3881	3234
			(508-762)	Fr	0.0046	0.0070	0.0093	0.0139	0.0186	0.0232	0.0278
				Feed (ipm)	90.0	90.0	90.0	90.0	90.0	90.0	90.0
	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 140 Bhn or ≤ 3 HRc	255	RPM	7793	5195	3896	2598	1948	1559	1299
			(204-306)	Fr	0.0018	0.0027	0.0036	0.0054	0.0072	0.0090	0.0108
				Feed (ipm)	14.0	14.0	14.0	14.0	14.0	14.0	14.0
		≤ 200 Bhn or ≤ 23 HRc	235	RPM	7182	4788	3591	2394	1795	1436	1197
			(188-282)	Fr	0.0018	0.0027	0.0036	0.0054	0.0072	0.0091	0.0109
				Feed (ipm)	13.0	13.0	13.0	13.0	13.0	13.0	13.0
S	SUPER ALLOYS (NICKEL , COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400, Rene, Waspaloy	≤ 300 Bhn or ≤ 32 HRc	65	RPM	1986	1324	993	662	497	397	331
			(52-78)	Fr	0.0009	0.0013	0.0017	0.0026	0.0034	0.0043	0.0051
				Feed (ipm)	1.7	1.7	1.7	1.7	1.7	1.7	1.7
		≤ 400 Bhn or ≤ 43 HRc	35	RPM	1070	713	535	357	267	214	178
			(28-42)	Fr	0.0006	0.0008	0.0011	0.0017	0.0022	0.0028	0.0034
				Feed (ipm)	0.6	0.6	0.6	0.6	0.6	0.6	0.6
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	≤ 275 Bhn or ≤ 28 HRc	185	RPM	5654	3769	2827	1885	1413	1131	942
			(148-222)	Fr	0.0016	0.0024	0.0032	0.0048	0.0064	0.0080	0.0096
				Feed (ipm)	9.0	9.0	9.0	9.0	9.0	9.0	9.0
		≤ 350 Bhn or ≤ 38 HRc	140	RPM	4278	2852	2139	1426	1070	856	713
			(112-168)	Fr	0.0012	0.0018	0.0023	0.0035	0.0047	0.0058	0.0070
				Feed (ipm)	5.0	5.0	5.0	5.0	5.0	5.0	5.0
	≤ 440 Bhn or ≤ 47 HRc	75	RPM	2292	1528	1146	764	573	458	382	
		(60-90)	Fr	0.0010	0.0015	0.0020	0.0030	0.0040	0.0050	0.0060	
			Feed (ipm)	2.3	2.3	2.3	2.3	2.3	2.3	2.3	
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 200 Bhn or ≤ 13 HRc	140	RPM	4278	2852	2139	1426	1070	856	713
			(112-168)	Fr	0.0020	0.0030	0.0040	0.0060	0.0079	0.0099	0.0119
				Feed (ipm)	8.5	8.5	8.5	8.5	8.5	8.5	8.5
		≤ 375 Bhn or ≤ 40 HRc	90	RPM	2750	1834	1375	917	688	550	458
			(72-108)	Fr	0.0011	0.0016	0.0022	0.0033	0.0044	0.0055	0.0065
				Feed (ipm)	3.0	3.0	3.0	3.0	3.0	3.0	3.0
		≤ 475 Bhn or ≤ 50 HRc	80	RPM	2445	1630	1222	815	611	489	407
			(64-96)	Fr	0.0006	0.0009	0.0012	0.0018	0.0025	0.0031	0.0037
				Feed (ipm)	1.5	1.5	1.5	1.5	1.5	1.5	1.5

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = Vc x 3.82 / DC

ipm = Fr x rpm

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Series 140M 8D Metric		Hardness	Vc (m/min)	DC • mm							
				3	6	8	10	12	14	16	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 175 Bhn or ≤ 7 HRc	123	RPM	13087	6544	4908	3926	3272	2804	2454
			(100-170)	Fr	0.085	0.171	0.228	0.285	0.342	0.399	0.455
				Feed (mm/min)	1118	1118	1118	1118	1118	1118	1118
		≤ 275 Bhn or ≤ 28 HRc	113	RPM	11956	5978	4484	3587	2989	2562	2242
			(90-135)	Fr	0.072	0.144	0.193	0.241	0.289	0.337	0.385
				Feed (mm/min)	864	864	864	864	864	864	864
		≤ 425 Bhn or ≤ 45 HRc	64	RPM	6786	3393	2545	2036	1696	1454	1272
			(51-77)	Fr	0.062	0.124	0.165	0.206	0.247	0.288	0.329
				Feed (mm/min)	419	419	419	419	419	419	419
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 275 Bhn or ≤ 28 HRc	98	RPM	10340	5170	3878	3102	2585	2216	1939
			(78-117)	Fr	0.061	0.123	0.164	0.205	0.246	0.287	0.328
				Feed (mm/min)	635	635	635	635	635	635	635
		≤ 375 Bhn or ≤ 40 HRc	58	RPM	6140	3070	2302	1842	1535	1316	1151
			(46-69)	Fr	0.048	0.095	0.127	0.159	0.190	0.222	0.254
				Feed (mm/min)	292	292	292	292	292	292	292
		≤ 450 Bhn or ≤ 48 HRc	41	RPM	4362	2181	1636	1309	1091	935	818
			(33-49)	Fr	0.038	0.076	0.101	0.126	0.151	0.177	0.202
				Feed (mm/min)	165	165	165	165	165	165	165
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 185 Bhn or ≤ 9 HRc	88	RPM	9371	4686	3514	2811	2343	2008	1757
			(71-106)	Fr	0.047	0.095	0.126	0.158	0.190	0.221	0.253
				Feed (mm/min)	445	445	445	445	445	445	445
		≤ 275 Bhn or ≤ 28 HRc	55	RPM	5816	2908	2181	1745	1454	1246	1091
			(44-66)	Fr	0.044	0.087	0.116	0.146	0.175	0.204	0.233
				Feed (mm/min)	254	254	254	254	254	254	254
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	≤ 275 Bhn or ≤ 28 HRc	40	RPM	4201	2100	1575	1260	1050	900	788
			(32-48)	Fr	0.042	0.085	0.113	0.141	0.169	0.198	0.226
				Feed (mm/min)	178	178	178	178	178	178	178
		≤ 375 Bhn or ≤ 40 HRc	29	RPM	3070	1535	1151	921	767	658	576
			(23-35)	Fr	0.037	0.074	0.099	0.124	0.149	0.174	0.199
				Feed (mm/min)	114	114	114	114	114	114	114
K	CAST IRONS Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	107	RPM	11310	5655	4241	3393	2827	2424	2121
			(85-128)	Fr	0.090	0.180	0.240	0.299	0.359	0.419	0.479
				Feed (mm/min)	1016	1016	1016	1016	1016	1016	1016
		≤ 260 Bhn or ≤ 26 HRc	94	RPM	10017	5009	3756	3005	2504	2147	1878
			(76-113)	Fr	0.094	0.188	0.250	0.313	0.375	0.438	0.500
				Feed (mm/min)	940	940	940	940	940	940	940

continued on next page

Series 140M 8D Metric		Hardness	Vc (m/min)	DC • mm							
				3	6	8	10	12	14	16	
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 80 Bhn or ≤ 47 HRb	223	RPM	23589	11795	8846	7077	5897	5055	4423
			(178-267)	Fr	0.108	0.215	0.287	0.359	0.431	0.502	0.574
				Feed (mm/min)	2540	2540	2540	2540	2540	2540	2540
		≤ 150 Bhn or ≤ 7 HRc	194	RPM	20519	10260	7695	6156	5130	4397	3847
			(155-232)	Fr	0.111	0.223	0.297	0.371	0.446	0.520	0.594
				Feed (mm/min)	2286	2286	2286	2286	2286	2286	2286
	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 140 Bhn or ≤ 3 HRc	78	RPM	8240	4120	3090	2472	2060	1766	1545
			(62-93)	Fr	0.043	0.086	0.115	0.144	0.173	0.201	0.230
				Feed (mm/min)	356	356	356	356	356	356	356
		≤ 200 Bhn or ≤ 23 HRc	72	RPM	7594	3797	2848	2278	1898	1627	1424
			(57-86)	Fr	0.043	0.087	0.116	0.145	0.174	0.203	0.232
				Feed (mm/min)	330	330	330	330	330	330	330
S	SUPER ALLOYS (NICKEL , COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400, Rene, Waspaloy	≤ 300 Bhn or ≤ 32 HRc	20	RPM	2100	1050	788	630	525	450	394
			(16-24)	Fr	0.021	0.041	0.055	0.069	0.082	0.096	0.110
				Feed (mm/min)	43	43	43	43	43	43	43
		≤ 400 Bhn or ≤ 43 HRc	11	RPM	1131	565	424	339	283	242	212
			(9-13)	Fr	0.013	0.027	0.036	0.045	0.054	0.063	0.072
				Feed (mm/min)	15	15	15	15	15	15	15
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	≤ 275 Bhn or ≤ 28 HRc	56	RPM	5978	2989	2242	1793	1495	1281	1121
			(45-68)	Fr	0.038	0.076	0.102	0.127	0.153	0.178	0.204
				Feed (mm/min)	229	229	229	229	229	229	229
		≤ 350 Bhn or ≤ 38 HRc	43	RPM	4524	2262	1696	1357	1131	969	848
			(34-51)	Fr	0.028	0.056	0.075	0.094	0.112	0.131	0.150
				Feed (mm/min)	127	127	127	127	127	127	127
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 200 Bhn or ≤ 13 HRc	43	RPM	4524	2262	1696	1357	1131	969	848
			(34-51)	Fr	0.048	0.095	0.127	0.159	0.191	0.223	0.255
				Feed (mm/min)	216	216	216	216	216	216	216
		≤ 375 Bhn or ≤ 40 HRc	27	RPM	2908	1454	1091	872	727	623	545
			(22-33)	Fr	0.026	0.052	0.070	0.087	0.105	0.122	0.140
				Feed (mm/min)	76	76	76	76	76	76	76
		≤ 475 Bhn or ≤ 50 HRc	24	RPM	2585	1293	969	776	646	554	485
			(20-29)	Fr	0.015	0.029	0.039	0.049	0.059	0.069	0.079
				Feed (mm/min)	38	38	38	38	38	38	38

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = (Vc x 1000) / (DC x 3.14)

mm/min = Fr x rpm

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)